



# BOSTON 316 STAINLESS STEEL



- 316 Marine Grade Stainless Steel
- Brushed 2B
- Sandblast
- Mirror Polish
- CUSTOM COAT RAL
- VANDA COAT Option

<b>Economical</b> A+++ A++ A+ A	<b>LED</b>	<b>Dimmable</b>	<b>IP65</b>	<b>IK10-150J</b>
<b>Vandal Resistant</b>	<b>Optional Motion Detection</b>	<b>Emergency Lighting</b>	<b>HIPE/SON</b>	<b>Fluorescent Options</b>

- 316 Marine Grade Stainless Steel Flat Dish Top
- Anodised Louvre Stack for Controlled Light Distribution
- Tough Clear or Frosted Polycarbonate Lens
- 316 Marine Grade Heavy Gauge Stainless Steel Tube
- Root or Flange Mounted
- Removable LED Gear Tray
- Flush Stainless Security Screw

### LED Technical Information

Please refer to website for current LED technical specification


Order Code	Lumen	V out	lm/W	W	Colour Temp	Ra	Weight
	Lm	Output Voltage	Lumen efficacy	Circuit Wattage	Kelvin (K)	CRI	Kg
<b>BOSS1.5LED</b>	1500lm	24	125	12.0	4000K/5000K	>80	12.0
<b>BOSS2.4LED</b>	2400lm	24	130	18.4	4000K/5000K	>80	12.0
<b>BOS3.3LED</b>	3300lm	24	136	24.2	4000K/5000K	>80	12.0

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)

**\*RGB Colour Change LED & \*\*Tuneable White LED options**

### Ordering Options

Description	Suffix Ordering Code
Root Mounted 'In Ground' Version	/RT
Flange Mounted 'Surface' Version	/FL
Heavy Duty Cast Collar	/CCOL
Brushed '2b' Polish Finish	/BRUSH
Fine Textured Sandblast Finish	/SAND
Mirror Polish Finish	/MIRROR
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Integral Dusk/Dawn Photocell	/PC
180° Light Baffle (Adjustable)	/180°
Clear Lens	/C
Frosted Lens	/F
Security Driver/Key	/SD
LED Compact Lamp Gear Tray (240v Mains)	/GT-LEDPL

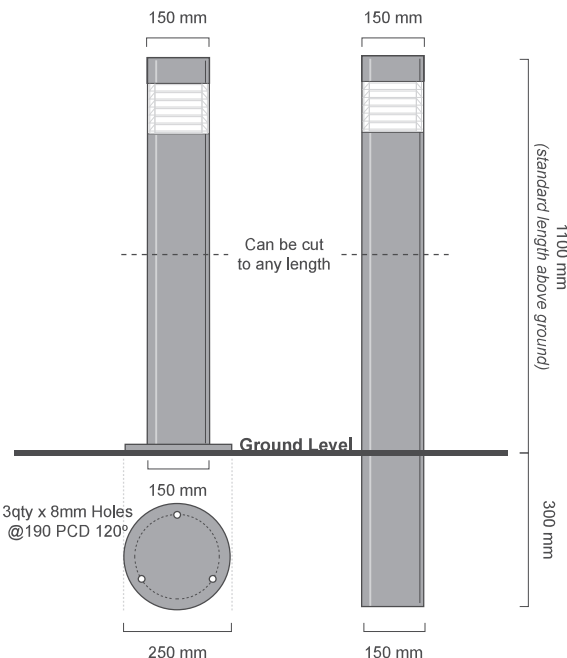

Exterior - Bollard

