



# BOULEVARD FLAT

Exterior - Bollard




RAL 9005 Black

RAL 9006 Silver

Grey

CUSTOM RAL

VANDA COAT Option

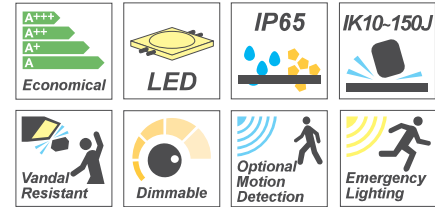

- Robust High Grade Aluminium Dome Head
- Efficient Conical Reflector for Optimum Light Distribution
- Tough Clear or Frosted Polycarbonate Lens
- Galvanised Heavy Gauge Steel Tube
- Root or Flange Mounted
- Mains Powered 24volt LED Head - *Improved Electrical Safety*
- Flush Stainless Security Screw

### LED Technical Information

Please refer to website for current LED technical specification

Order Code	Lumen	V out	lm/W	W	Colour Temp	Ra	Weight
	Lm	Output Voltage	Lumen efficacy	Circuit Wattage	Kelvin (K)	CRI	Kg
BUVF1.5LED	1500lm	24	125	12.0	4000K/5000K	>80	12.0
BUVF2.4LED	2400lm	24	130	18.4	4000K/5000K	>80	12.0
BUVF3.3LED	3300lm	24	136	24.2	4000K/5000K	>80	12.0

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)

**\*RGB Colour Change LED & \*\*Tunable White LED options**

### Ordering Options

Description	Suffix Ordering Code
Root Mounted 'In Ground' Version	/RT
Flange Mounted 'Surface' Version	/FL
Heavy Duty Cast Collar	/CCOL
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Integral Dusk/Dawn Photocell	/PC
180° Light Baffle (Adjustable)	/180°
Clear Lens	/C
Frosted Lens	/F
Security Driver/Key	/SD
Access Door Hatch (Lockable)	/HATCH
LED Compact Lamp Gear Tray (240v Mains)	/GT-LEDPL

