



Amenity Lighting

COMMANDER SMALL



- Resilient Fully Welded Galvanised Steel Body
- Surface & Recessed Mounted
- Side and Rear Cable Entry (*Optional*)
- Two Diffuser Options:-
 - Moulded Dish Polycarbonate
 - Regressed Bezel Flat Panel
- Removable LED Gear Tray
- Stainless Steel Security Screw


Linear LED Technical Information

Please refer to website for current LED technical specification


Order Code	Length		Lumens		lm/W	W	Colour Temp	Ra	Weight
	HE	HO mm	HE	HO					
COMS 1.0	1.5	375	1000lm	1500lm	115	8.6 -13.0	3000K/4000K	>80	5.0
COMS 2.0	2.5	375	2000lm	2500lm	112	17.8 - 22.3	3000K/4000K	>80	5.0

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)

Dish Diffuser

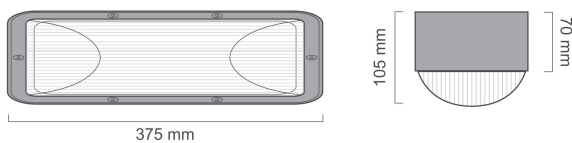

Flat Bezel Diffuser

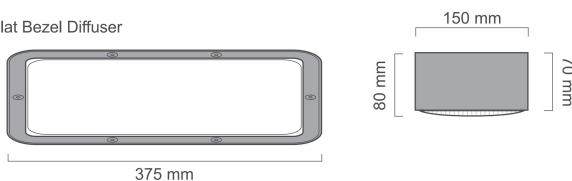

Recess Cut Out Dimensions	Recess Flange Dimensions
385mm x 160mm	425mm x 200mm

Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole
- Various Conduit Side Entry On Request

Ordering Options

Description	Suffix Ordering Code
Surface Mounted Body Version	/SM
Recess Mounted Body Version	/RM
Exterior Fully Weatherproof Version	/EXT
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Dish Frosted Diffuser	/DF
Dish Clear Stippled Diffuser	/DP
Flat Frosted Panel Bezel	/FL-F
Flat Clear Stippled Panel Bezel	/FL-P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5