




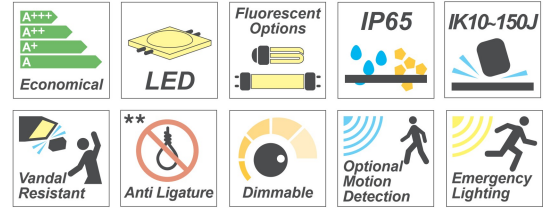

CURVÕS

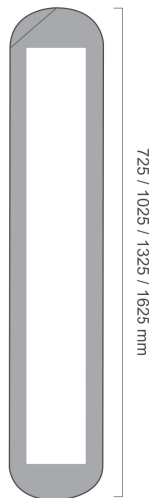

- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Gentle Curved Endcaps
- Fully Welded Fabricated Galvanised Steel Version
- Regressed Bezel & Captive Polycarbonate Diffuser
- Countersunk Stainless Steel Security Screw Fixing
- Removable LED Gear Tray



Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole

Linear LED Technical Information

Please refer to website for current LED technical specification

Order Code	Length	Lumens	lm/W	W	Colour Temp	Ra	Weight
HE	HO mm	HE	HO	Lumen efficacy (HE)	Circuit wattage (HO) Kelvin (K)	CRI	Kg
CURV 1.3	2.6 600	1300lm	2600lm	115	13.8 - 25.2 3000K/4000K	>80	8.5
CURV 1.9	3.9 900	1950lm	3900lm	112	19.9 - 37.4 3000K/4000K	>80	10.5
CURV 2.6	5.2 1200	2600lm	5200lm	110	26.1 - 49.8 3000K/4000K	>80	12.5
CURV 3.2	6.5 1500	3250lm	6500lm	108	32.6 - 62.7 3000K/4000K	>80	14.5

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)

***RGB Colour Change LED & **Tunable White LED options**

Ordering Options

Description	Suffix Ordering Code
Exterior Fully Weatherproof Version	/EXT
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser	/F
Clear Stippled Diffuser	/P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5

Custodial

Healthcare, Decorative & Anti-ligature

