



RENOUND SQUARE



**NOMS
Anti
Ligature**

| | | | |
|--|--|----------------------|----------------------------------|
| A+++ A++ A+ A Economical | LED | IP65 | IK10-150J |
| Dimmable | NOMS STD/E/SPEC/022 | Anti Ligature | Optional Motion Detection |
| Night Light | * National Offender Management Service - For Safer Cell Accommodation ** Anti Ligature must be correctly installed using 'Anti Pick' Mastic | | |



High specification NOMS robust, vandal resistant, anti ligature luminaires for Safer Cell accommodation. Ceiling or wall mounted. Sensitive area use such as Prisons, Police Stations, Law Courts, Secure Healthcare etc

- For Safer Cell Accommodation NOMS STD/E/SPEC/022*
- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Heavy Duty Fully Welded Steel Body
- Galvanised Steel Version for Wet Area
- Heavy Gauge Flush Fit GRP Frosted Bezel Diffuser
- Removable LED Gear Tray
- Optional Night Light

LED Technical Information

Please refer to website for current LED technical specification

| Order Code | Lumen | | mA | | lm/W | | W | | Colour Temp | | Ra | Weight |
|-------------------|--------|-----------------|----------------|-----------------|-------------|-----|------|--|-------------|--|----|--------|
| | Lm | forward current | Lumen efficacy | Circuit Wattage | Kelvin (K) | CRI | Kg | | | | | |
| RFXS1.5LED | 1500lm | 500 | 114 | 13.2 | 3000K/4000K | >80 | 12.0 | | | | | |
| RFXS2.1LED | 2100lm | 600 | 112 | 18.7 | 3000K/4000K | >80 | 12.0 | | | | | |
| RFXS2.5LED | 2550lm | 700 | 105 | 24.2 | 3000K/4000K | >80 | 12.0 | | | | | |


* NOMS SAFER CELLULAR = RNDS-NOMS2.6*5.2LED-3K/W/F/NL-LED-3K

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)

***RGB Colour Change LED & **Tuneable White LED options**

Ordering Options

| Description | Suffix Ordering Code |
|--|--------------------------------|
| Galvanised Steel Body Weatherproof Version | /GALV |
| Dimmable Options (DALI/1-10v/Sw-240v/Corridor) | /DALI / 1-10v / SW-240v / CORR |
| Integral 3hr Emergency or 3hr Self Test | /EM3 or /EM3-SELF |
| Microwave Motion Detection | /M-Wave |
| Night Light | /NL |
| Frosted Diffuser | /GRP-F |
| Clear Stippled Diffuser | /GRP-P |
| Security Driver/Key | /SD |
| Stainless Steel Version (316/304/430 Grades) | On Request |
| LED Linear Tube Gear Tray (240v Mains) | /GT-LEDT5 |

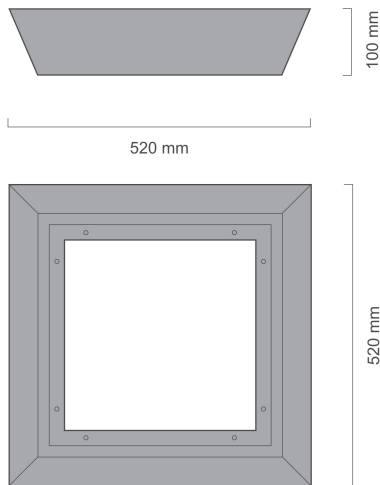

Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole

