



Amenity Lighting

# SQUADRON ROUND




- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Tough Arduous Heavy Die Cast Aluminium Base
- Two Diffuser Options
- Removable LED Gear Tray
- Stainless Steel Security Screw

### LED Technical Information

Please refer to website for current LED technical specification

Order Code	Lumen	mA	lm/W	W	Colour Temp	Ra	Weight
	Lm	forward current	Lumen efficacy	Circuit Wattage	Kelvin (K)	CRI	Kg
<b>SQDR1.2LED</b>	1250lm	350	117	10.6	3000K/4000K	>80	4.0
<b>SQDR1.7LED</b>	1750lm	500	114	15.3	3000K/4000K	>80	4.0
<b>SQDR2.1LED</b>	2100lm	350	112	18.7	3000K/4000K	>80	4.0
<b>SQDR2.5LED</b>	2550lm	500	105	24.2	3000K/4000K	>80	4.0
<b>SQDR3.0LED</b>	3000lm	500	110	27.2	3000K/4000K	>80	4.0

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)

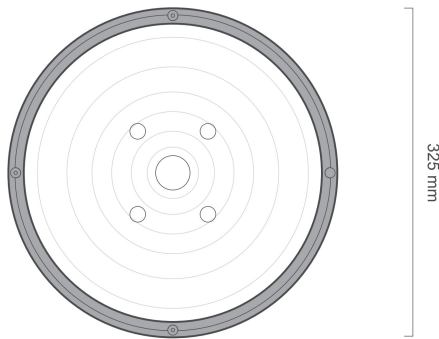

325 mm



85 mm

#### Standard Fixing Detail

- No Fixing Mounting Holes - Blank Back Body
- No Cable Entry - Blank Back Body

### Ordering Options

Description	Suffix Ordering Code
Exterior Fully Weatherproof Version	/EXT
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser (Updated Version)	/DF
Heavy Duty Frosted Diffuser (Updated Version)	/DF-HG
Clear Stippled Diffuser (Updated Version)	/DP
Heavy Duty Clear Stippled Diffuser (Updated Version)	/DP-HG
Eyelid Diffuser Cover	/EYE
Grille Diffuser Cover	/GRILL
Security Driver/Key	/SD
LED Compact Lamp Gear Tray (240v Mains)	/GT-LEDPL