




TITAN 4



**NOMS
Anti
Ligature**

 Economical	 LED	 IP65	 IK10-150J
 Dimmable	 Night Light	 NOMS STD/E/ SPEC/022	 Optional Motion Detection
 Anti Ligature	* National Offender Management Service - For Safer Cell Accommodation ** Anti Ligature must be correctly installed using 'Anti Pick' Mastic		

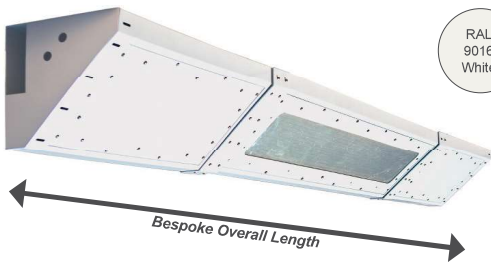

- For Safer Cell Accommodation NOMS STD/E/SPEC/022*
- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Heavy Duty Fully Welded Steel Body
- Heavy Gauge Flush Fit GRP Frosted Bezel Diffuser
- Removable LED Gear Tray
- 3 Compartment Internal Trunking
- Optional Night Light

Linear LED Technical Information

Please refer to website for current LED technical specification

Order Code	Length		Lumens		lm/W	W	Colour Temp	Ra	Weight
	HE	HO mm	HE	HO					
TTN4 1.3	2.6	800	1300lm	2600lm	115	13.8 - 25.2	3000K/4000K	>80	15.0
TTN4 1.9	3.9	1100	1950lm	3900lm	112	19.9 - 37.4	3000K/4000K	>80	17.0
TTN4 2.6	5.2	1400	2600lm	5200lm	110	26.1 - 49.8	3000K/4000K	>80	20.0
TTN4 3.2	6.5	1700	3250lm	6500lm	108	32.6 - 62.7	3000K/4000K	>80	23.0

* NOMS SAFER CELLULAR = WYV3-NOMS2.6+5.2LED-3K/W/F/NL-LED-3K

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)


***RGB Colour Change LED & **Tunable White LED options**

Ordering Options



Description	Suffix Ordering Code
Wall to Wall Mounting (Length TBC)	/WALL-TBC
Services Provision (CCTV, Fire Alarm, Air Circulation)	/SERV
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
GRP Frosted Diffuser	/GRP-F
GRP Clear Stippled Diffuser	/GRP-P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5

High specification cornice mounted luminaire manufactured to overall customer specified lengths, designed to run wall to wall or as individual fitting. Integral trunking for through wiring. Provisions for services (CCTV, Fire Alarm etc) can be integrated on request.


Wall to Wall Mounting



Individual Mounting

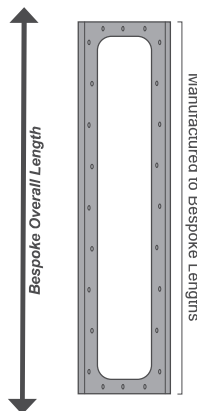

Manufactured to Bespoke Lengths

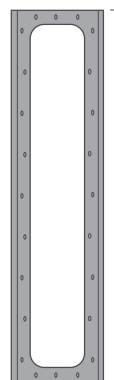

800 / 1100 / 1400 / 1700mm