



Amenity Lighting

WARRIOR



Eyelid Diffuser




- Tough Arduous Heavy Die Cast Aluminium Base
- 20mm End Conduit Entry
- Various Diffuser Option
- Two Diffuser Options:-
 - Moulded Dish Polycarbonate
 - Flat Bezel Polycarbonate Panel
- Removable LED Gear Tray
- Stainless Steel Security Screw

LED Technical Information

Please refer to website for current LED technical specification

Order Code	Lumen	mA	lm/W	W	Colour Temp	Ra	Weight
	Lm	forward current	Lumen efficacy	Circuit Wattage	Kelvin (K)	CRI	Kg
WAR2.1LED	2100lm	500	112	18.7	3000K/4000K	>80	6.0
WAR2.5LED	2550lm	700	105	24.2	3000K/4000K	>80	6.0
WAR3.0LED	3000lm	500	110	27.2	3000K/4000K	>80	6.0
WAR4.0LED	4000lm	800	106	37.7	3000K/4000K	>80	6.0
WAR5.0LED	5000lm	900	105	47.6	3000K/4000K	>80	6.0

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)

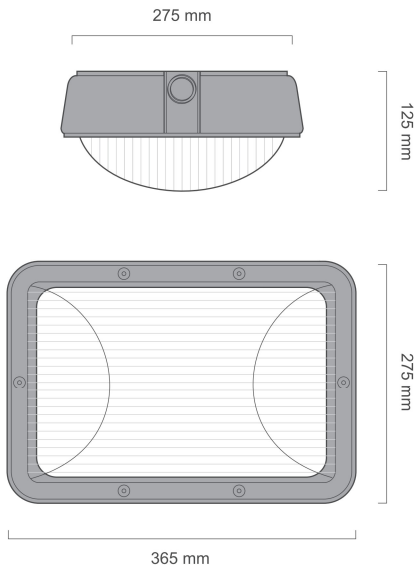

Standard Fixing Detail

- No Fixing Mounting Holes - Blank Back Body
- No Cable Entry - Blank Back Body

Ordering Options

Description	Suffix Ordering Code
IP66 Gasket	/IP66
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Integral Dusk/Dawn Photocell (uses one of the 20mm conduit entries)	/PC
Heavy Duty Frosted Diffuser	/DF
Heavy Duty Clear Stippled Diffuser	/DP
Flat Frosted Panel Diffuser	/FL-F
Flat Clear Stippled Panel Diffuser	/FL-P
Eyelid Diffuser Cover	/EYE
Grille Diffuser Cover	/GRILL
Security Driver/Key	/SD
LED Compact Lamp Gear Tray (240v Mains)	/GT-LEDPL