



WYEVALE II



 Economical	 LED	 LED	 IP65	 IK10-150V
 Vandal Resistant	 Dimmable	 Night Light	 Emergency Lighting	 Optional Motion Detection
 Anti Ligature	 NOMS STD/E/SPEC/021	* National Offender Management Service - For Standard Cellular Accommodation ** Anti Ligature must be correctly installed using 'Anti Pick' Mastic		

- For Standard Cellular Accommodation NOMS STD/E/SPEC/021*
- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Fully Welded Steel Body
- Heavy Gauge Regressed Bezel & Captive Polycarbonate Diffuser
- Countersunk Stainless Steel Security Screw Fixing
- Removable LED Gear Tray



Linear LED Technical Information

Please refer to website for current LED technical specification


Order Code	Length	Lumens	lm/W	W	Colour Temp	Ra	Weight		
	HE	HO mm	HE	HO	Lumen efficacy (HE)	Circuit wattage (HO)	Kelvin (K)	CRI	Kg
WYE2 1.3	2.6	600	1300lm	2600lm	115	13.8 - 25.2	3000K/4000K	>80	8.0
WYE2 1.9	3.9	900	1950lm	3900lm	112	19.9 - 37.4	3000K/4000K	>80	10.0
WYE2 2.6	5.2	1200	2600lm	5200lm	110	26.1 - 49.8	3000K/4000K	>80	12.0
WYE2 3.2	6.5	1500	3250lm	6500lm	108	32.6 - 62.7	3000K/4000K	>80	14.0

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)

***RGB Colour Change LED & **Tunable White LED options**

Ordering Options

Description	Suffix Ordering Code
Exterior Fully Weatherproof Version	/EXT
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser	/F
Clear Stippled Diffuser	/P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5

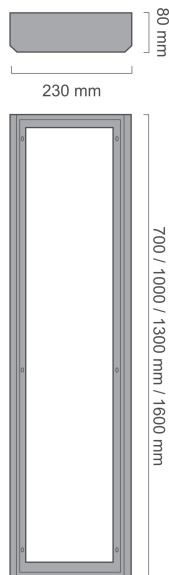

Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole

Custodial