




WYEVALE

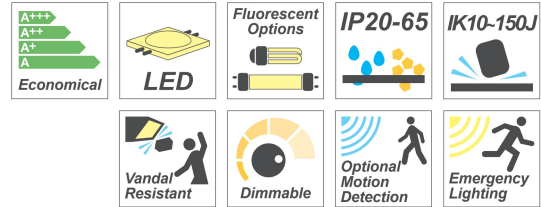


- Anti Ligature Must be correctly installed using 'Anti Pick' Mastic
- Fully Welded Fabricated Steel Body
- Regressed Gasketed Bezel
- Captive Polycarbonate Diffuser
- Countersunk Stainless Steel Security Screw Fixing
- Removable LED Gear Tray

Linear LED Technical Information

Please refer to website for current LED technical specification

Order Code	Length	Lumens		Im/W		W	Colour Temp	Ra	Weight
		HE	HO	HE	HO				
WYE 1.0	2.0	350	1000lm	2000lm	115	8.6 - 17.3	3000K/4000K	>80	3.0
WYE 1.3	2.6	650	1300lm	2600lm	115	11.3 - 22.6	3000K/4000K	>80	5.0
WYE 1.9	3.9	950	1950lm	3900lm	112	17.4 - 34.8	3000K/4000K	>80	7.0
WYE 2.6	5.2	1250	2600lm	5200lm	110	23.6 - 47.2	3000K/4000K	>80	9.0
WYE 3.2	6.5	1550	3250lm	6500lm	108	30.0 - 60.1	3000K/4000K	>80	11.0

LED Life-time 50,000Hr L80/B10 (@ 25°C - 40°C)

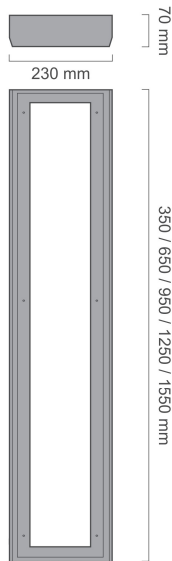

Standard Fixing Detail

- 4qty x 6mm Ø Back Body Corner Mounting Holes
- 1qty x 20mm Ø Back Body Centre Cable Entry Hole

Ordering Options

Description	Suffix Ordering Code
IP65 Gasket	/IP65
Exterior Fully Weatherproof Version	/EXT
Dimmable Options (DALI/1-10v/Sw-240v/Corridor)	/DALI / 1-10v / SW-240v / CORR
Integral 3hr Emergency or 3hr Self Test	/EM3 or /EM3-SELF
Microwave Motion Detection	/M-Wave
Night Light	/NL
Frosted Diffuser	/F
Clear Stippled Diffuser	/P
Security Driver/Key	/SD
Stainless Steel Version (316/304/430 Grades)	On Request
LED Linear Tube Gear Tray (240v Mains)	/GT-LEDT5

